


Connect **WEB Mini Cold Carbonator** for home use according to plan with CO2 Bottle and Output unit.

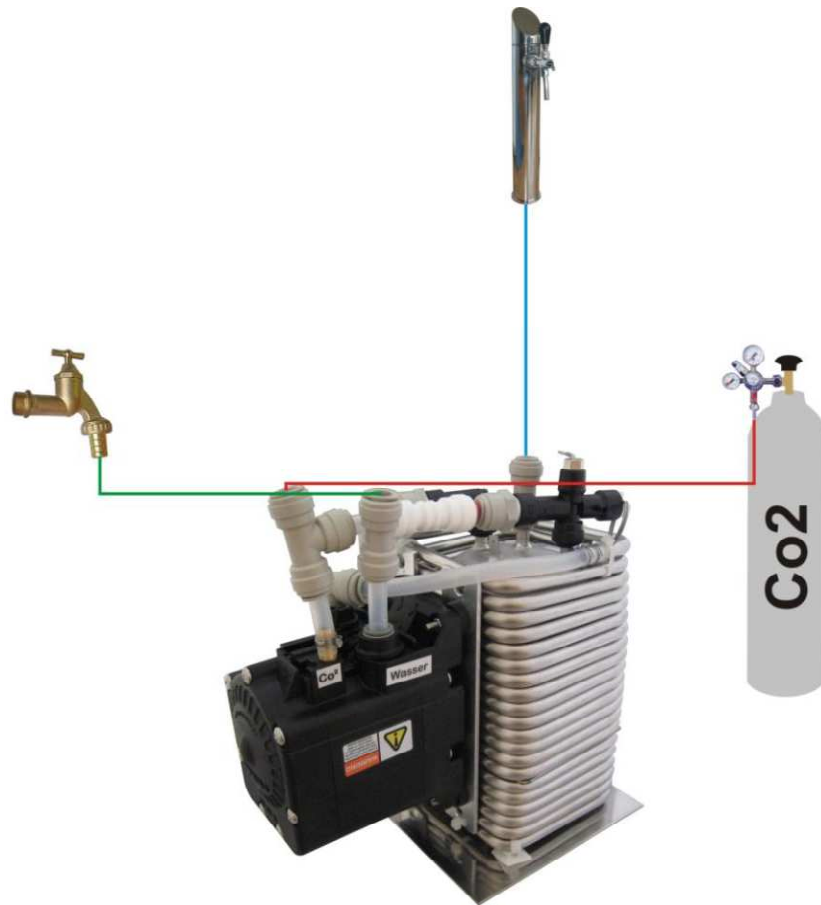

Adjustment WEB-Mini-Cold Carbonator

Turn on water line (pressure should be between 2bar – 2,5 bar, by higher water pressure must be installed a Water-Pressure-Regulator our Item-Number: 07.00131)

Turn on CO2 Bottle and adjust pressure between 5bar – 6bar (pressure should not be higher than 6bar)

The Carbonator is now ready for using!



Caution!!
In assembly is to provide a flood protection!

For safety reasons is the need to ensure that the operation times out of co2 and water is shut off.

Description **WEB** Cold-Carbonator



Particularities

- Small construction
- Current-free operation
- Installed only high quality industrial parts
- High CO₂ content in the soda-water
- Suitable for installation in a fridge

For the installation Cold-Carbonator you still need:

- 1x CO₂ Primary Pressure Regulator (our Item-Number 09.00070)
- 1x CO₂ Bottle (our Item-Number 09.09080)
- Tube 6,7x9,5 (our item-Number 06.01700)
- 1x Soda Output Unit (our item-Number 10.00010+10.00020 or a standard column)